


Kilomux-2100/2104

## KHS.2

## 2-Channel Synchronous Data Module

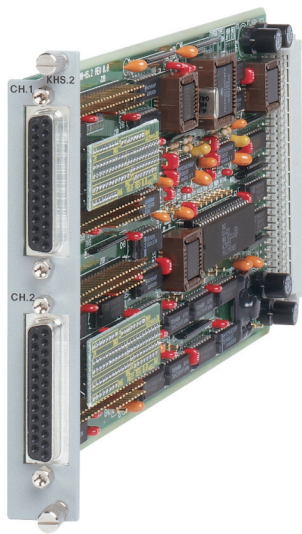

- Selectable data rates in multiples of 2.4, 4.8, 9.6 or 19.2 (depending on the main link rate).
- Separate DB-25 connector for each channel
- Each channel can be configured for V.24/RS-232, V.35, RS-530, V.36/RS-449 or X.21 interface
- Independent parameter selection for each channel
- Local support or end-to-end control signal transfer

KHS.2 is a high-speed data module providing two high-speed synchronous data channels for the Kilomux system. Operating parameters can be programmed independently for each channel.

The data rate on each channel can be selected in the following increments:

- $n \times 2.4$  kbps for main link speeds of up to 192 kbps
- $n \times 4.8$  kbps for main link speeds of 256 kbps or 384 kbps
- $n \times 9.6$  kbps for main link speeds of 512 or 768 kbps
- $n \times 19.2$  kbps for main link speeds of 1024 or 1536 kbps.

This ability to program the module in small increments results in a more effective use of the main link bandwidth.

Each channel can be configured for one of three timing modes (DCE, DTE1 and DTE2).

Built-in elastic buffers enable connection to all types of digital lines. A channel configured for DTE2 clock mode can be used as a reference for the Kilomux transmit clock. The physical interface of KHS.2 emulates a DCE, therefore special cables are provided for connection to another DCE (see *Ordering*).

One control signal per channel can be transmitted end-to-end for handshaking purposes. Typical end-to-end delay is 2.5 msec.

Comprehensive diagnostics reduce downtime to a minimum. These include local loopback, remote loopback, PRBS injection and BER test (PRBS injection and BER test are limited to one channel at a time). Automatic self-test, buffer monitoring and alarm reporting are performed during power-up and normal operation.

## Two synchronous data channels




data communications

The Access Company

# KHS.2

## 2-Channel Synchronous Data Module

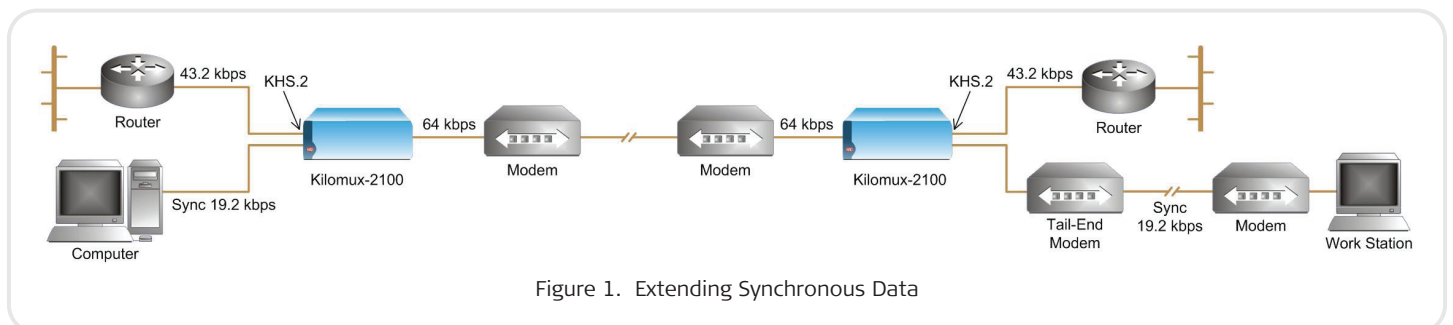

## Specifications

### Number of Channels

2

### Interface (Electrical)

V.24/RS-232, V.35 or  
V.11/RS-422, selectable

### Interface (Physical)

V.24/RS-232  
RS 530 (convertible to V.35, V.36/RS-449,  
or X.21 via adapter cables see  
*Ordering*)

### Connectors

Two 25-pin D-type, female

### Pin Assignment

Per EIA RS-530 and  
ITU-T V.24/RS-232

### Channel Data Rates

According to main link rate employed:  
up to 192 kbps:  $n \times 2.4$  kbps ( $n = 1$  to 53)  
256 kbps:  $n \times 4.8$  kbps ( $n = 1$  to 53)  
384 kbps:  $n \times 4.8$  kbps ( $n = 1$  to 64)  
512 kbps:  $n \times 9.6$  kbps ( $n = 1$  to 53)  
768 kbps:  $n \times 9.6$  kbps ( $n = 1$  to 64)  
1024 or 1536 kbps:  $n \times 19.2$  kbps  
( $n = 1$  to 32)

### Data Clamp

Mark hold on Out of Sync

### Bandwidth Allocation on Main Link

Automatic, according to the programmed  
channel data rate

### Control Signals

Local support: RTS-CTS delay, software  
controlled DSR and DCD

End-to-end, selectable per channel:  
RTS-DCD, DTR-DSR (V.24 interface only)

### Timing Modes

DCE: Transmit and receive clocks to  
synchronous DTE

DTE1: Transmit clock from tail-end modem  
(synchronous DCE) and receive clock to  
tail-end modem

DTE2: Both transmit and receive clocks  
from tail-end modem (synchronous DCE)

### Diagnostics

Independent for each channel,  
software-controlled:

- Local loopback
- Remote loopback
- Built-in PRBS injection
- BER test

Auto self-test upon power-up and during  
normal operation

### Indicators

For selected channel: TX, RX, RTS and DCD  
on Kilomux front panel  
Kilomux Alarm Indications (KAI) module

### Management

Programmable via terminal interface, Telnet  
or RADview Network Management System

## KHS.2

## 2-Channel Synchronous Data Module

## Ordering

KM-2000M-KHS.2

## OPTIONAL ACCESSORIES

## CBL-HS2/\*/#

Adapter cable for KHS.2's DB-25 channel connectors. Converts to connector of type specified (separate cable is needed for each connector). Cable must be chosen to match the desired clock mode. Cable length is 2m (6 ft).

## Legend

- \* Clock mode interface:
  - V1 34-pin V.35, DCE
  - V2 34-pin V.35, DTE1
  - V3 34-pin V.35, DTE2
  - R1 37-pin V.36/RS-449, DCE
  - R2 37-pin V.36/RS-449, DTE1
  - R3 37-pin V.36/RS-449, DTE2
  - X1 15-pin X.21, DCE (30 cm/1 ft long)
- # Cable connector type (on user side):
  - F for female
  - M for male

Table 1. Kilomux-2100/2104 Data Modules

	KHS.1	KHS.2	KHS.U	KHS.703	KLS.1/N	KLS.2
No. of Channels	2	2	1	2	2	4
Interface	V.35, RS-530, V.36/RS-449 or X.21	V.35, RS-530, V.36/RS-449 or X.21, V.24/RS-232	ISDN "U"	Codirectional, per G.703	V.24/RS-232, Sync or Async	V.24/RS-232
Connector	Two 25-pin D-type, female	Two 25-pin D-type, female	RJ-45	RJ-45	Two 25-pin D-type, female	Four RJ-45 connectors
Data Rates	32, 48, 56, 64, 128, 192, 256 or 384 kbps*	2.4 kbps to 614.4 kbps*	Per B Channel 16, 32 and 64 kbps Per D Channel 16 kbps	64 kbps	Group 1: 300 bps to 38.4 kbps, sync and async, Group 2: 7.2, 14.4, 28.8, 57.6 kbps, sync and async, Group 3: 8, 16, 24, 32, 48, 56, 64 kbps, sync	300 bps to 19.2 kbps async. (statistically multiplexed)

**Note:** The supported channel data rates specified in Table 1 are dependent on the main link rates employed. To view limitations please refer to Specifications in the relevant module data sheets.

**International Headquarters**  
24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 6474436  
E-mail market@rad.com

**North America Headquarters**  
900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail market@radusa.com

[www.rad.com](http://www.rad.com)

Order this publication by Catalog No. 800968



data communications

The Access Company